




TECHNICAL DATA:

Easy accessible device,
according to standard EN 1176-1:2017


Device dimensions:	3,54 x 0,96m
Device height:	2,80m
Minimum space:	6,85 x 3,88m
Falling area:	21,28m ²
Critical fall height:	0,90m
Foundations depth:	-0,60m

Top view with falling area

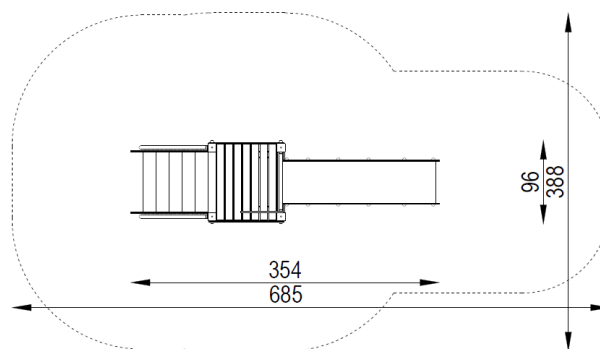

The device according to EN 1176-1:2012
Playground equipment and surfacing – Part 1:
General safety requirements and test methods.

Safety surfaces: turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

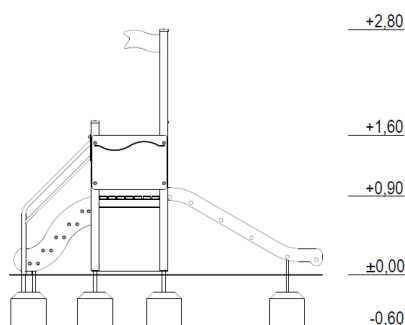

COMPONENTS:

Tower without roof, platform 0,90m - 1 item
Entry stairs 0,90m - 1 item
Slide. 0,90m - 1 item
Flagpole - 1 item.

MATERIALS:

Construction poles: steel square profiles with a cross-section of 80x80mm, galvanized, powder coated in RAL 9007
Anchors: hot-dip galvanized black steel
Flat decorative elements: HDPE sheets, 15mm thick
Platforms, gangways: waterproof formwork plywood, coated with phenolic film, with non-slip layer, based on steel structure
Steel elements: galvanized black steel, powder coated
Chains: bath-galvanized steel
Surface of slope slide: stainless steel, 1,5 mm thick
Caps: plastic
Foundations: concrete min. C12/15 standard



GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.